


Series description: Wilo-CronoLine-IL

Wilo-CronoLine IL



CronoLine-IL

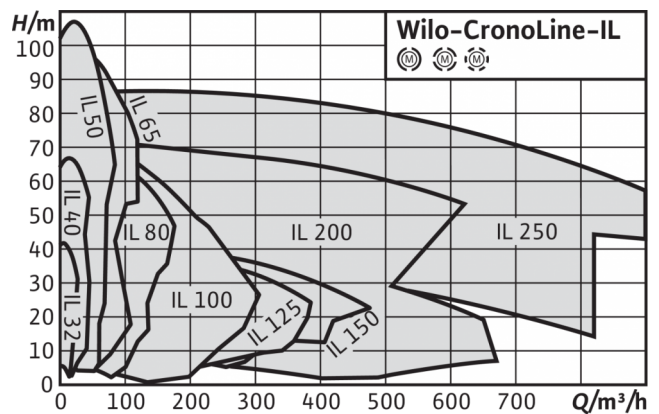

Design type

Glanded pump in in-line design with flange connection

Application

Pumping of heating water (acc. to VDI 2035), cold water and water/glycol mixtures without abrasive substances in heating, cold water and cooling systems.

Scope of delivery

- Pump
- Installation and operating instructions

Type key

Example	IL 40/160-4/2
IL	In-line pump
40	Nominal diameter DN of the pipe connection
160	Nominal impeller diameter
4	Rated motor power P2 in kW
2	Number of poles

Technical data

- Permissible temperature range -20 °C to +140 °C
- Mains connection 3~400 V, 50 Hz (others on request)
- Protection class IP 55
- Nominal diameter DN 32 to DN 250
- Max. operating pressure 16 bar (25 bar on request)

Materials

- Pump housing and lantern: Standard: EN-GJL-250; optionally spheroidal cast iron EN-GJS-400-18-LT
- Impeller: Standard: EN-GJL-200; special version: Bronze CuSn 10
- Shaft: 1.4122
- Mechanical seal: AQEGG; other mechanical seals on request

Description/construction

Single-stage, low-pressure centrifugal pump in in-line design with

- Mechanical seal
- Flange connection with pressure measuring connection R 1/8
- Lantern
- Coupling
- IEC standard motor

Special features/product advantages

- Reduced life cycle costs thanks to optimized efficiency
- Standard condensate drainage holes in the motor housings
- Can be used flexibly in air-conditioning and cooling systems, with application benefits due to direct draining of condensate via optimised lantern design (patented)
- High standard of corrosion protection thanks to cataphoretic coating
- High worldwide availability of standard motors (according to Wilo specifications) and standard mechanical seals

Product list: Wilo-CronoLine-IL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Port-to-port length l_0	Nominal flange diameter	Gross weight, approx. m	Article number
CronoLine-IL 32/140-1,5/2	3~400 V, 50 Hz	IE3	1.50 kW	320 mm	DN 32	57.7 kg	2120862
CronoLine-IL 32/150-2,2/2	3~400 V, 50 Hz	IE3	2.20 kW	320 mm	DN 32	60.2 kg	2120863
CronoLine-IL 32/160-2,2/2	3~400 V, 50 Hz	IE3	2.20 kW	320 mm	DN 32	60.2 kg	2120864
CronoLine-IL 32/160-3/2	3~400 V, 50 Hz	IE3	3.00 kW	320 mm	DN 32	63.8 kg	2120865
CronoLine-IL 32/170-3/2	3~400 V, 50 Hz	IE3	3.00 kW	320 mm	DN 32	63.8 kg	2120866
CronoLine-IL 32/170-4/2	3~400 V, 50 Hz	IE3	4.00 kW	320 mm	DN 32	71.4 kg	2120867
CronoLine-IL 40/140-2,2/2	3~400 V, 50 Hz	IE3	2.20 kW	340 mm	DN 40	61.2 kg	2120868
CronoLine-IL 40/150-3/2	3~400 V, 50 Hz	IE3	3.00 kW	340 mm	DN 40	65.8 kg	2120869
CronoLine-IL 40/160-4/2	3~400 V, 50 Hz	IE3	4.00 kW	340 mm	DN 40	70.7 kg	2120870
CronoLine-IL 40/170-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	340 mm	DN 40	93.5 kg	2120871
CronoLine-IL 40/200-7,5/2	3~400 V, 50 Hz	IE3	7.50 kW	440 mm	DN 40	131.0 kg	2120872
CronoLine-IL 40/220-11/2	3~400 V, 50 Hz	IE3	11.00 kW	440 mm	DN 40	179.0 kg	2120873
CronoLine-IL 50/110-1,5/2	3~400 V, 50 Hz	IE3	1.50 kW	340 mm	DN 50	56.7 kg	2120874
CronoLine-IL 50/120-2,2/2	3~400 V, 50 Hz	IE3	2.20 kW	340 mm	DN 50	59.2 kg	2120875
CronoLine-IL 50/130-3/2	3~400 V, 50 Hz	IE3	3.00 kW	340 mm	DN 50	63.8 kg	2120876
CronoLine-IL 50/140-3/2	3~400 V, 50 Hz	IE3	3.00 kW	340 mm	DN 50	63.8 kg	2120877
CronoLine-IL 50/140-4/2	3~400 V, 50 Hz	IE3	4.00 kW	340 mm	DN 50	71.4 kg	2120878
CronoLine-IL 50/160-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	340 mm	DN 50	97.5 kg	2120879
CronoLine-IL 50/170-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	340 mm	DN 50	97.5 kg	2120880
CronoLine-IL 50/170-7,5/2	3~400 V, 50 Hz	IE3	7.50 kW	340 mm	DN 50	104.5 kg	2120881
CronoLine-IL 50/180-7,5/2	3~400 V, 50 Hz	IE3	7.50 kW	440 mm	DN 50	113.5 kg	2120882
CronoLine-IL 50/210-11/2	3~400 V, 50 Hz	IE3	11.00 kW	440 mm	DN 50	182.0 kg	2120883
CronoLine-IL 50/220-11/2	3~400 V, 50 Hz	IE3	11.00 kW	440 mm	DN 50	182.0 kg	2120884

Product list: Wilo-CronoLine-IL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Port-to-port length l_0	Nominal flange diameter	Gross weight, approx. m	Article number
CronoLine-IL 50/220-15/2	3~400 V, 50 Hz	IE3	15.00 kW	440 mm	DN 50	201.0 kg	2120885
CronoLine-IL 50/250-18,5/2	3~400 V, 50 Hz	IE3	18.50 kW	440 mm	DN 50	226.0 kg	2120886
CronoLine-IL 50/250-22/2	3~400 V, 50 Hz	IE3	22.00 kW	440 mm	DN 50	308.0 kg	2120887
CronoLine-IL 50/270-22/2	3~400 V, 50 Hz	IE3	22.00 kW	440 mm	DN 50	308.0 kg	2120888
CronoLine-IL 50/270-30/2	3~400 V, 50 Hz	IE3	30.00 kW	440 mm	DN 50	369.0 kg	2120889
CronoLine-IL 65/110-3/2	3~400 V, 50 Hz	IE3	3.00 kW	340 mm	DN 65	66.8 kg	2120890
CronoLine-IL 65/120-3/2	3~400 V, 50 Hz	IE3	3.00 kW	340 mm	DN 65	66.8 kg	2120891
CronoLine-IL 65/120-4/2	3~400 V, 50 Hz	IE3	4.00 kW	340 mm	DN 65	74.4 kg	2120892
CronoLine-IL 65/130-4/2	3~400 V, 50 Hz	IE3	4.00 kW	340 mm	DN 65	74.4 kg	2120893
CronoLine-IL 65/130-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	340 mm	DN 65	94.5 kg	2120894
CronoLine-IL 65/140-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	340 mm	DN 65	94.5 kg	2120895
CronoLine-IL 65/140-7,5/2	3~400 V, 50 Hz	IE3	7.50 kW	340 mm	DN 65	101.5 kg	2120896
CronoLine-IL 65/150-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	430 mm	DN 65	103.5 kg	2120897
CronoLine-IL 65/160-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	430 mm	DN 65	103.5 kg	2120898
CronoLine-IL 65/160-7,5/2	3~400 V, 50 Hz	IE3	7.50 kW	430 mm	DN 65	110.5 kg	2120899
CronoLine-IL 65/170-11/2	3~400 V, 50 Hz	IE3	11.00 kW	430 mm	DN 65	169.0 kg	2120900
CronoLine-IL 65/200-11/2	3~400 V, 50 Hz	IE3	11.00 kW	475 mm	DN 65	189.0 kg	2120901
CronoLine-IL 65/200-15/2	3~400 V, 50 Hz	IE3	15.00 kW	475 mm	DN 65	207.0 kg	2120902
CronoLine-IL 65/210-15/2	3~400 V, 50 Hz	IE3	15.00 kW	475 mm	DN 65	207.0 kg	2120903
CronoLine-IL 65/210-18,5/2	3~400 V, 50 Hz	IE3	18.50 kW	475 mm	DN 65	224.0 kg	2120904
CronoLine-IL 65/220-18,5/2	3~400 V, 50 Hz	IE3	18.50 kW	475 mm	DN 65	223.0 kg	2120905
CronoLine-IL 65/220-22/2	3~400 V, 50 Hz	IE3	22.00 kW	475 mm	DN 65	306.0 kg	2120906
CronoLine-IL 65/240-30/2	3~400 V, 50 Hz	IE3	30.00 kW	475 mm	DN 65	373.0 kg	2120907

Product list: Wilo-CronoLine-IL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Port-to-port length l_0	Nominal flange diameter	Gross weight, approx. m	Article number
CronoLine-IL 65/260-30/2	3~400 V, 50 Hz	IE3	30.00 kW	475 mm	DN 65	373.0 kg	2120908
CronoLine-IL 65/260-37/2	3~400 V, 50 Hz	IE3	37.00 kW	475 mm	DN 65	392.0 kg	2120909
CronoLine-IL 80/110-3/2	3~400 V, 50 Hz	IE3	3.00 kW	400 mm	DN 80	76.8 kg	2120910
CronoLine-IL 80/120-4/2	3~400 V, 50 Hz	IE3	4.00 kW	400 mm	DN 80	84.3 kg	2120911
CronoLine-IL 80/130-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	400 mm	DN 80	102.5 kg	2120912
CronoLine-IL 80/140-7,5/2	3~400 V, 50 Hz	IE3	7.50 kW	400 mm	DN 80	109.5 kg	2120913
CronoLine-IL 80/150-7,5/2	3~400 V, 50 Hz	IE3	7.50 kW	440 mm	DN 80	117.5 kg	2120914
CronoLine-IL 80/160-11/2	3~400 V, 50 Hz	IE3	11.00 kW	440 mm	DN 80	176.0 kg	2120915
CronoLine-IL 80/170-11/2	3~400 V, 50 Hz	IE3	11.00 kW	440 mm	DN 80	176.0 kg	2120916
CronoLine-IL 80/170-15/2	3~400 V, 50 Hz	IE3	15.00 kW	440 mm	DN 80	194.0 kg	2120917
CronoLine-IL 80/190-15/2	3~400 V, 50 Hz	IE3	15.00 kW	500 mm	DN 80	213.0 kg	2120918
CronoLine-IL 80/190-18,5/2	3~400 V, 50 Hz	IE3	18.50 kW	500 mm	DN 80	229.0 kg	2120919
CronoLine-IL 80/200-18,5/2	3~400 V, 50 Hz	IE3	18.50 kW	500 mm	DN 80	229.0 kg	2120920
CronoLine-IL 80/200-22/2	3~400 V, 50 Hz	IE3	22.00 kW	500 mm	DN 80	312.0 kg	2120921
CronoLine-IL 80/210-30/2	3~400 V, 50 Hz	IE3	30.00 kW	500 mm	DN 80	366.0 kg	2120922
CronoLine-IL 80/220-22/2	3~400 V, 50 Hz	IE3	22.00 kW	500 mm	DN 80	315.0 kg	2120923
CronoLine-IL 80/220-30/2	3~400 V, 50 Hz	IE3	30.00 kW	500 mm	DN 80	366.0 kg	2120924
CronoLine-IL 100/145-11/2	3~400 V, 50 Hz	IE3	11.00 kW	500 mm	DN 100	194.0 kg	2120925
CronoLine-IL 100/150-15/2	3~400 V, 50 Hz	IE3	15.00 kW	500 mm	DN 100	212.0 kg	2120926
CronoLine-IL 100/160-15/2	3~400 V, 50 Hz	IE3	15.00 kW	500 mm	DN 100	212.0 kg	2120927
CronoLine-IL 100/160-18,5/2	3~400 V, 50 Hz	IE3	18.50 kW	500 mm	DN 100	228.0 kg	2120928
CronoLine-IL 100/165-22/2	3~400 V, 50 Hz	IE3	22.00 kW	500 mm	DN 100	311.0 kg	2120929
CronoLine-IL 100/170-22/2	3~400 V, 50 Hz	IE3	22.00 kW	500 mm	DN 100	311.0 kg	2120930

Product list: Wilo-CronoLine-IL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Port-to-port length l_0	Nominal flange diameter	Gross weight, approx. m	Article number
CronoLine-IL 100/170-30/2	3~400 V, 50 Hz	IE3	30.00 kW	500 mm	DN 100	362.0 kg	2120931
CronoLine-IL 100/190-30/2	3~400 V, 50 Hz	IE3	30.00 kW	550 mm	DN 100	380.0 kg	2120932
CronoLine-IL 100/210-30/2	3~400 V, 50 Hz	IE3	30.00 kW	550 mm	DN 100	380.0 kg	2120933
CronoLine-IL 100/210-37/2	3~400 V, 50 Hz	IE3	37.00 kW	550 mm	DN 100	399.0 kg	2120934
CronoLine-IL 125/145-15/2	3~400 V, 50 Hz	IE3	15.00 kW	620 mm	DN 125	234.0 kg	2120935
CronoLine-IL 125/150-18,5/2	3~400 V, 50 Hz	IE3	18.50 kW	620 mm	DN 125	250.0 kg	2120936
CronoLine-IL 125/160-22/2	3~400 V, 50 Hz	IE3	22.00 kW	620 mm	DN 125	332.0 kg	2120937
CronoLine-IL 125/165-30/2	3~400 V, 50 Hz	IE3	30.00 kW	620 mm	DN 125	384.0 kg	2120938
CronoLine-IL 125/170-37/2	3~400 V, 50 Hz	IE3	37.00 kW	620 mm	DN 125	403.0 kg	2120939
CronoLine-IL 32/140-0,25/4	3~400 V, 50 Hz	IE2	0.25 kW	320 mm	DN 32	39.5 kg	2063574
CronoLine-IL 32/170-0,55/4	3~400 V, 50 Hz	IE2	0.55 kW	320 mm	DN 32	44.7 kg	2088306
CronoLine-IL 32/150-0,37/4	3~400 V, 50 Hz	IE2	0.37 kW	320 mm	DN 32	40.0 kg	2088307
CronoLine-IL 40/160-0,55/4	3~400 V, 50 Hz	IE2	0.55 kW	340 mm	DN 40	46.7 kg	2088316
CronoLine-IL 40/150-0,37/4	3~400 V, 50 Hz	IE2	0.37 kW	340 mm	DN 40	42.0 kg	2088318
CronoLine-IL 40/140-0,25/4	3~400 V, 50 Hz	IE2	0.25 kW	340 mm	DN 40	41.5 kg	2088320
CronoLine-IL 50/150-0,55/4	3~400 V, 50 Hz	IE2	0.55 kW	340 mm	DN 50	51.7 kg	2088339
CronoLine-IL 40/170-0,75/4	3~400 V, 50 Hz	IE3	0.75 kW	340 mm	DN 40	49.2 kg	2120750
CronoLine-IL 40/210-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	440 mm	DN 40	68.2 kg	2120751
CronoLine-IL 40/220-1,5/4	3~400 V, 50 Hz	IE3	1.50 kW	440 mm	DN 40	70.7 kg	2120752
CronoLine-IL 50/160-0,75/4	3~400 V, 50 Hz	IE3	0.75 kW	340 mm	DN 50	54.2 kg	2120753
CronoLine-IL 50/170-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	340 mm	DN 50	62.2 kg	2120754
CronoLine-IL 50/200-1,5/4	3~400 V, 50 Hz	IE3	1.50 kW	440 mm	DN 50	76.7 kg	2120755
CronoLine-IL 50/220-2,2/4	3~400 V, 50 Hz	IE3	2.20 kW	440 mm	DN 50	85.7 kg	2120756

Product list: Wilo-CronoLine-IL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Port-to-port length l_0	Nominal flange diameter	Gross weight, approx. m	Article number
CronoLine-IL 50/260-3/4	3~400 V, 50 Hz	IE3	3.00 kW	440 mm	DN 50	101.5 kg	2120757
CronoLine-IL 50/270-3/4	3~400 V, 50 Hz	IE3	3.00 kW	440 mm	DN 50	101.5 kg	2120758
CronoLine-IL 50/270-4/4	3~400 V, 50 Hz	IE3	4.00 kW	440 mm	DN 50	126.0 kg	2120759
CronoLine-IL 65/150-0,75/4	3~400 V, 50 Hz	IE3	0.75 kW	430 mm	DN 65	61.1 kg	2120760
CronoLine-IL 65/160-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	430 mm	DN 65	69.2 kg	2120761
CronoLine-IL 65/170-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	430 mm	DN 65	69.2 kg	2120762
CronoLine-IL 65/170-1,5/4	3~400 V, 50 Hz	IE3	1.50 kW	430 mm	DN 65	71.7 kg	2120763
CronoLine-IL 65/210-2,2/4	3~400 V, 50 Hz	IE3	2.20 kW	475 mm	DN 65	90.5 kg	2120764
CronoLine-IL 65/220-2,2/4	3~400 V, 50 Hz	IE3	2.20 kW	475 mm	DN 65	90.5 kg	2120765
CronoLine-IL 65/220-3/4	3~400 V, 50 Hz	IE3	3.00 kW	475 mm	DN 65	98.5 kg	2120766
CronoLine-IL 65/250-3/4	3~400 V, 50 Hz	IE3	3.00 kW	475 mm	DN 65	122.0 kg	2120767
CronoLine-IL 65/250-4/4	3~400 V, 50 Hz	IE3	4.00 kW	475 mm	DN 65	129.0 kg	2120768
CronoLine-IL 65/270-4/4	3~400 V, 50 Hz	IE3	4.00 kW	475 mm	DN 65	129.0 kg	2120769
CronoLine-IL 65/270-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	475 mm	DN 65	166.0 kg	2120770
CronoLine-IL 80/145-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	440 mm	DN 80	77.2 kg	2120771
CronoLine-IL 80/150-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	440 mm	DN 80	77.2 kg	2120772
CronoLine-IL 80/160-1,5/4	3~400 V, 50 Hz	IE3	1.50 kW	440 mm	DN 80	79.7 kg	2120773
CronoLine-IL 80/170-2,2/4	3~400 V, 50 Hz	IE3	2.20 kW	440 mm	DN 80	90.5 kg	2120774
CronoLine-IL 80/210-3/4	3~400 V, 50 Hz	IE3	3.00 kW	500 mm	DN 80	105.5 kg	2120775
CronoLine-IL 80/220-4/4	3~400 V, 50 Hz	IE3	4.00 kW	500 mm	DN 80	130.0 kg	2120776
CronoLine-IL 80/270-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	500 mm	DN 80	135.0 kg	2120777
CronoLine-IL 100/145-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	500 mm	DN 100	91.0 kg	2120778
CronoLine-IL 100/150-1,5/4	3~400 V, 50 Hz	IE3	1.50 kW	500 mm	DN 100	93.5 kg	2120779

Product list: Wilo-CronoLine-IL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Port-to-port length l_0	Nominal flange diameter	Gross weight, approx. m	Article number
CronoLine-IL 100/160-2,2/4	3~400 V, 50 Hz	IE3	2.20 kW	500 mm	DN 100	100.5 kg	2120780
CronoLine-IL 100/170-2,2/4	3~400 V, 50 Hz	IE3	2.20 kW	500 mm	DN 100	100.5 kg	2120781
CronoLine-IL 100/170-3/4	3~400 V, 50 Hz	IE3	3.00 kW	500 mm	DN 100	111.5 kg	2120782
CronoLine-IL 100/200-3/4	3~400 V, 50 Hz	IE3	3.00 kW	550 mm	DN 100	136.0 kg	2120783
CronoLine-IL 100/200-4/4	3~400 V, 50 Hz	IE3	4.00 kW	550 mm	DN 100	143.0 kg	2120784
CronoLine-IL 100/220-4/4	3~400 V, 50 Hz	IE3	4.00 kW	550 mm	DN 100	143.0 kg	2120785
CronoLine-IL 100/220-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	550 mm	DN 100	181.0 kg	2120786
CronoLine-IL 100/250-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	550 mm	DN 100	193.0 kg	2120787
CronoLine-IL 100/250-7,5/4	3~400 V, 50 Hz	IE3	7.50 kW	550 mm	DN 100	203.0 kg	2120788
CronoLine-IL 100/260-7,5/4	3~400 V, 50 Hz	IE3	7.50 kW	550 mm	DN 100	203.0 kg	2120789
CronoLine-IL 100/260-11/4	3~400 V, 50 Hz	IE3	11.00 kW	550 mm	DN 100	230.0 kg	2120790
CronoLine-IL 100/270-11/4	3~400 V, 50 Hz	IE3	11.00 kW	550 mm	DN 100	230.0 kg	2120791
CronoLine-IL 125/145-1,5/4	3~400 V, 50 Hz	IE3	1.50 kW	620 mm	DN 125	132.0 kg	2120792
CronoLine-IL 125/150-2,2/4	3~400 V, 50 Hz	IE3	2.20 kW	620 mm	DN 125	142.0 kg	2120793
CronoLine-IL 125/160-3/4	3~400 V, 50 Hz	IE3	3.00 kW	620 mm	DN 125	150.0 kg	2120794
CronoLine-IL 125/170-4/4	3~400 V, 50 Hz	IE3	4.00 kW	620 mm	DN 125	157.0 kg	2120795
CronoLine-IL 125/190-4/4	3~400 V, 50 Hz	IE3	4.00 kW	620 mm	DN 125	157.0 kg	2120796
CronoLine-IL 125/210-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	620 mm	DN 125	195.0 kg	2120797
CronoLine-IL 125/220-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	620 mm	DN 125	195.0 kg	2120798
CronoLine-IL 125/220-7,5/4	3~400 V, 50 Hz	IE3	7.50 kW	620 mm	DN 125	207.0 kg	2120799
CronoLine-IL 125/250-11/4	3~400 V, 50 Hz	IE3	11.00 kW	620 mm	DN 125	255.0 kg	2120800
CronoLine-IL 125/270-11/4	3~400 V, 50 Hz	IE3	11.00 kW	620 mm	DN 125	255.0 kg	2120801
CronoLine-IL 125/270-15/4	3~400 V, 50 Hz	IE3	15.00 kW	620 mm	DN 125	277.0 kg	2120802

Product list: Wilo-CronoLine-IL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Port-to-port length l_0	Nominal flange diameter	Gross weight, approx. m	Article number
CronoLine-IL 125/300-15/4	3~400 V, 50 Hz	IE3	15.00 kW	700 mm	DN 125	309.0 kg	2120803
CronoLine-IL 125/300-18,5/4	3~400 V, 50 Hz	IE3	18.50 kW	700 mm	DN 125	339.0 kg	2120804
CronoLine-IL 125/320-18,5/4	3~400 V, 50 Hz	IE3	18.50 kW	700 mm	DN 125	340.0 kg	2120805
CronoLine-IL 125/320-22/4	3~400 V, 50 Hz	IE3	22.00 kW	700 mm	DN 125	391.0 kg	2120806
CronoLine-IL 125/340-22/4	3~400 V, 50 Hz	IE3	22.00 kW	700 mm	DN 125	391.0 kg	2120807
CronoLine-IL 125/340-30/4	3~400 V, 50 Hz	IE3	30.00 kW	700 mm	DN 125	454.0 kg	2120808
CronoLine-IL 150/190-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	700 mm	DN 150	227.0 kg	2120809
CronoLine-IL 150/200-7,5/4	3~400 V, 50 Hz	IE3	7.50 kW	700 mm	DN 150	237.0 kg	2120810
CronoLine-IL 150/220-11/4	3~400 V, 50 Hz	IE3	11.00 kW	700 mm	DN 150	263.0 kg	2120811
CronoLine-IL 150/250-15/4	3~400 V, 50 Hz	IE3	15.00 kW	700 mm	DN 150	338.0 kg	2120812
CronoLine-IL 150/260-15/4	3~400 V, 50 Hz	IE3	15.00 kW	700 mm	DN 150	338.0 kg	2120813
CronoLine-IL 150/260-18,5/4	3~400 V, 50 Hz	IE3	18.50 kW	700 mm	DN 150	368.0 kg	2120814
CronoLine-IL 150/270-18,5/4	3~400 V, 50 Hz	IE3	18.50 kW	700 mm	DN 150	368.0 kg	2120815
CronoLine-IL 150/270-22/4	3~400 V, 50 Hz	IE3	22.00 kW	700 mm	DN 150	419.0 kg	2120816
CronoLine-IL 200/230-11/4	3~400 V, 50 Hz	IE3	11.00 kW	800 mm	DN 200	377.0 kg	2120827
CronoLine-IL 200/240-15/4	3~400 V, 50 Hz	IE3	15.00 kW	800 mm	DN 200	399.0 kg	2120828
CronoLine-IL 200/250-18,5/4	3~400 V, 50 Hz	IE3	18.50 kW	800 mm	DN 200	430.0 kg	2120829
CronoLine-IL 200/260-22/4	3~400 V, 50 Hz	IE3	22.00 kW	800 mm	DN 200	481.0 kg	2120830
CronoLine-IL 200/265-22/4	3~400 V, 50 Hz	IE3	22.00 kW	800 mm	DN 200	481.0 kg	2120831
CronoLine-IL 200/265-30/4	3~400 V, 50 Hz	IE3	30.00 kW	800 mm	DN 200	552.0 kg	2120832
CronoLine-IL 200/270-30/4	3~400 V, 50 Hz	IE3	30.00 kW	800 mm	DN 200	552.0 kg	2120833
CronoLine-IL 250/460-132/4	3~400 V, 50 Hz	IE3	132.00 kW	1200 mm	DN 200	720.0 kg	2120856
CronoLine-IL 250/460-160/4	3~400 V, 50 Hz	IE3	160.00 kW	1200 mm	DN 200	720.0 kg	2120857

Product list: Wilo-CronoLine-IL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Port-to-port length l_0	Nominal flange diameter	Gross weight, approx. m	Article number
CronoLine-IL 250/470-160/4	3~400 V, 50 Hz	IE3	160.00 kW	1200 mm	DN 200	720.0 kg	2120858
CronoLine-IL 250/470-200/4	3~400 V, 50 Hz	IE3	200.00 kW	1200 mm	DN 200	720.0 kg	2120859
CronoLine-IL 250/480-160/4	3~400 V, 50 Hz	IE3	160.00 kW	1200 mm	DN 200	720.0 kg	2120860
CronoLine-IL 250/480-200/4	3~400 V, 50 Hz	IE3	200.00 kW	1200 mm	DN 200	720.0 kg	2120861
CronoLine-IL 65/120-0,55/4	3~400 V, 50 Hz	IE2	0.55 kW	340 mm	DN 65	46.7 kg	2139459
CronoLine-IL 65/130-0,75/4	3~400 V, 50 Hz	IE3	0.75 kW	340 mm	DN 65	50.2 kg	2142041
CronoLine-IL 65/140-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	340 mm	DN 65	58.2 kg	2142042
CronoLine-IL 150/305-30/4	3~400 V, 50 Hz	IE3	30.00 kW	770 mm	DN 150	516.0 kg	2142043
CronoLine-IL 150/325-30/4	3~400 V, 50 Hz	IE3	30.00 kW	770 mm	DN 150	516.0 kg	2142044
CronoLine-IL 150/325-37/4	3~400 V, 50 Hz	IE3	37.00 kW	770 mm	DN 150	554.0 kg	2142045
CronoLine-IL 150/335-37/4	3~400 V, 50 Hz	IE3	37.00 kW	770 mm	DN 150	554.0 kg	2142046
CronoLine-IL 150/335-45/4	3~400 V, 50 Hz	IE3	45.00 kW	770 mm	DN 150	589.0 kg	2142047
CronoLine-IL 200/300-37/4	3~400 V, 50 Hz	IE3	37.00 kW	820 mm	DN 200	629.0 kg	2142048
CronoLine-IL 200/315-37/4	3~400 V, 50 Hz	IE3	37.00 kW	820 mm	DN 200	629.0 kg	2142049
CronoLine-IL 200/335-37/4	3~400 V, 50 Hz	IE3	37.00 kW	820 mm	DN 200	629.0 kg	2142050
CronoLine-IL 200/335-45/4	3~400 V, 50 Hz	IE3	45.00 kW	820 mm	DN 200	664.0 kg	2142051
CronoLine-IL 200/345-45/4	3~400 V, 50 Hz	IE3	45.00 kW	820 mm	DN 200	664.0 kg	2142052
CronoLine-IL 200/345-55/4	3~400 V, 50 Hz	IE3	55.00 kW	820 mm	DN 200	920.0 kg	2142053
CronoLine-IL 200/360-45/4	3~400 V, 50 Hz	IE3	45.00 kW	1100 mm	DN 200	894.0 kg	2145051
CronoLine-IL 200/370-55/4	3~400 V, 50 Hz	IE3	55.00 kW	1100 mm	DN 200	1100.0 kg	2145052
CronoLine-IL 200/380-75/4	3~400 V, 50 Hz	IE3	75.00 kW	1100 mm	DN 200	1078.0 kg	2145053
CronoLine-IL 200/390-90/4	3~400 V, 50 Hz	IE3	90.00 kW	1100 mm	DN 200	1096.0 kg	2145054
CronoLine-IL 200/400-110/4	3~400 V, 50 Hz	IE3	110.00 kW	1100 mm	DN 200	1504.0 kg	2145055

Product list: Wilo-CronoLine-IL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Port-to-port length l_0	Nominal flange diameter	Gross weight, approx. m	Article number
CronoLine-IL 100/400-45/4	3~400 V, 50 Hz	IE3	45.00 kW	760 mm	DN 100	660.0 kg	2151496
CronoLine-IL 100/390-37/4	3~400 V, 50 Hz	IE3	37.00 kW	760 mm	DN 100	625.0 kg	2151497
CronoLine-IL 100/380-30/4	3~400 V, 50 Hz	IE3	30.00 kW	760 mm	DN 100	556.0 kg	2151498
CronoLine-IL 100/370-22/4	3~400 V, 50 Hz	IE3	22.00 kW	760 mm	DN 125	494.0 kg	2151499
CronoLine-IL 100/360-18,5/4	3~400 V, 50 Hz	IE3	18.50 kW	760 mm	DN 100	443.0 kg	2151500
CronoLine-IL 100/350-15/4	3~400 V, 50 Hz	IE3	15.00 kW	760 mm	DN 100	413.0 kg	2151501
CronoLine-IL 250/445-160/4	3~400 V, 50 Hz	IE3	160.00 kW	1150 mm	DN 200	720.0 kg	2151780
CronoLine-IL 250/445-132/4	3~400 V, 50 Hz	IE3	132.00 kW	1150 mm	DN 200	720.0 kg	2151781
CronoLine-IL 250/435-160/4	3~400 V, 50 Hz	IE3	160.00 kW	1150 mm	DN 200	720.0 kg	2151782
CronoLine-IL 250/435-132/4	3~400 V, 50 Hz	IE3	132.00 kW	1150 mm	DN 200	720.0 kg	2151783
CronoLine-IL 250/425-132/4	3~400 V, 50 Hz	IE3	132.00 kW	1150 mm	DN 200	720.0 kg	2151784
CronoLine-IL 250/425-110/4	3~400 V, 50 Hz	IE3	110.00 kW	1150 mm	DN 200	720.0 kg	2151785
CronoLine-IL 250/415-132/4	3~400 V, 50 Hz	IE3	132.00 kW	1150 mm	DN 200	720.0 kg	2151786
CronoLine-IL 250/415-110/4	3~400 V, 50 Hz	IE3	110.00 kW	1150 mm	DN 200	720.0 kg	2151787
CronoLine-IL 250/405-110/4	3~400 V, 50 Hz	IE3	110.00 kW	1150 mm	DN 200	720.0 kg	2151788
CronoLine-IL 250/405-90/4	3~400 V, 50 Hz	IE3	90.00 kW	1150 mm	DN 200	587.0 kg	2151789
CronoLine-IL 250/395-110/4	3~400 V, 50 Hz	IE3	110.00 kW	1150 mm	DN 200	720.0 kg	2151790
CronoLine-IL 250/395-90/4	3~400 V, 50 Hz	IE3	90.00 kW	1150 mm	DN 200	587.0 kg	2151791
CronoLine-IL 250/385-90/4	3~400 V, 50 Hz	IE3	90.00 kW	1150 mm	DN 200	587.0 kg	2151792
CronoLine-IL 250/385-75/4	3~400 V, 50 Hz	IE3	75.00 kW	1150 mm	DN 200	587.0 kg	2151793
CronoLine-IL 250/375-75/4	3~400 V, 50 Hz	IE3	75.00 kW	1150 mm	DN 200	587.0 kg	2151794
CronoLine-IL 250/365-75/4	3~400 V, 50 Hz	IE3	75.00 kW	1150 mm	DN 200	587.0 kg	2151795
CronoLine-IL 200/400-90/4	3~400 V, 50 Hz	IE3	90.00 kW	1100 mm	DN 200	1096.0 kg	2155276

Product list: Wilo-CronoLine-IL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Port-to-port length l_0	Nominal flange diameter	Gross weight, approx. m	Article number
CronoLine-IL 200/390-75/4	3~400 V, 50 Hz	IE3	75.00 kW	1100 mm	DN 200	1078.0 kg	2155277
CronoLine-IL 200/380-55/4	3~400 V, 50 Hz	IE3	55.00 kW	1100 mm	DN 200	1100.0 kg	2155278
CronoLine-IL 200/370-45/4	3~400 V, 50 Hz	IE3	45.00 kW	1100 mm	DN 200	894.0 kg	2155279
CronoLine-IL 200/360-37/4	3~400 V, 50 Hz	IE3	37.00 kW	1100 mm	DN 200	858.0 kg	2155280
CronoLine-IL 125/400-55/4	3~400 V, 50 Hz	IE3	55.00 kW	860 mm	DN 125	971.0 kg	2160653
CronoLine-IL 125/390-45/4	3~400 V, 50 Hz	IE3	45.00 kW	860 mm	DN 125	723.0 kg	2160654
CronoLine-IL 125/380-37/4	3~400 V, 50 Hz	IE3	37.00 kW	860 mm	DN 125	688.0 kg	2160655
CronoLine-IL 150/400-90/4	3~400 V, 50 Hz	IE3	90.00 kW	940 mm	DN 150	1118.0 kg	2160659
CronoLine-IL 150/390-75/4	3~400 V, 50 Hz	IE3	75.00 kW	940 mm	DN 150	1090.0 kg	2160660
CronoLine-IL 150/380-55/4	3~400 V, 50 Hz	IE3	55.00 kW	940 mm	DN 150	994.0 kg	2160661
CronoLine-IL 150/370-45/4	3~400 V, 50 Hz	IE3	45.00 kW	940 mm	DN 150	735.0 kg	2160662
CronoLine-IL 150/360-37/4	3~400 V, 50 Hz	IE3	37.00 kW	940 mm	DN 150	700.0 kg	2160663
CronoLine-IL 100/400-37/4	3~400 V, 50 Hz	IE3	37.00 kW	760 mm	DN 100	625.0 kg	2160875
CronoLine-IL 100/390-30/4	3~400 V, 50 Hz	IE3	30.00 kW	760 mm	DN 100	556.0 kg	2160876
CronoLine-IL 100/380-22/4	3~400 V, 50 Hz	IE3	22.00 kW	760 mm	DN 100	494.0 kg	2160877
CronoLine-IL 100/370-18,5/4	3~400 V, 50 Hz	IE3	18.50 kW	760 mm	DN 100	443.0 kg	2160878
CronoLine-IL 100/360-15/4	3~400 V, 50 Hz	IE3	15.00 kW	760 mm	DN 100	413.0 kg	2160879
CronoLine-IL 100/350-11/4	3~400 V, 50 Hz	IE3	11.00 kW	760 mm	DN 100	391.0 kg	2160880
CronoLine-IL 125/400-45/4	3~400 V, 50 Hz	IE3	45.00 kW	860 mm	DN 125	723.0 kg	2169765
CronoLine-IL 125/390-37/4	3~400 V, 50 Hz	IE3	37.00 kW	860 mm	DN 125	688.0 kg	2169766
CronoLine-IL 125/380-30/4	3~400 V, 50 Hz	IE3	30.00 kW	860 mm	DN 125	620.0 kg	2169767
CronoLine-IL 150/400-75/4	3~400 V, 50 Hz	IE3	75.00 kW	940 mm	DN 150	1090.0 kg	2169768
CronoLine-IL 150/390-55/4	3~400 V, 50 Hz	IE3	55.00 kW	940 mm	DN 150	994.0 kg	2169769

Product list: Wilo-CronoLine-IL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Port-to-port length l_0	Nominal flange diameter	Gross weight, approx. m	Article number
CronoLine-IL 150/380-45/4	3~400 V, 50 Hz	IE3	45.00 kW	940 mm	DN 150	735.0 kg	2169770
CronoLine-IL 150/370-37/4	3~400 V, 50 Hz	IE3	37.00 kW	940 mm	DN 150	700.0 kg	2169771
CronoLine-IL 150/360-30/4	3~400 V, 50 Hz	IE3	30.00 kW	940 mm	DN 150	631.0 kg	2169772
CronoLine-IL 200/240-7,5/6	3~400 V, 50 Hz	IE3	7.50 kW	800 mm	DN 200	385.0 kg	2120940
CronoLine-IL 200/260-7,5/6	3~400 V, 50 Hz	IE3	7.50 kW	800 mm	DN 200	385.0 kg	2120941
CronoLine-IL 200/270-11/6	3~400 V, 50 Hz	IE3	11.00 kW	800 mm	DN 200	400.0 kg	2120942