


Series description: Wilo-CronoTwin-DL

Wilo-CronoTwin-DL



CronoTwin-DL

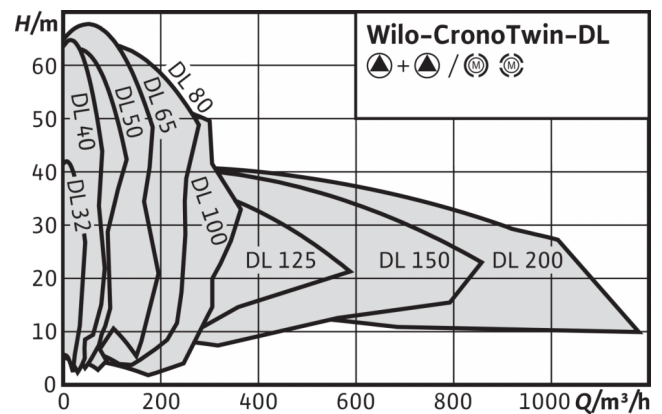

Design type

Glanded twin-head pump in in-line design with flange connection

Application

Pumping of heating water (acc. to VDI 2035), cold water and water/glycol mixtures without abrasive substances in heating, cold water and cooling systems.

Equipment/function

NO VALUE

Scope of delivery

- Pump
- Installation and operating instructions

Type key

Example	DL 40/160-4/2
DL	In-line twin-head pump
40	Nominal diameter DN of the pipe connection
160	Nominal impeller diameter
4	Rated motor power P ₂ in kW
2	Number of poles

Technical data

- Permissible temperature range -20 °C to +140 °C
- Mains connection 3~400 V, 50 Hz (others on request)
- Protection class IP 55
- Nominal diameter DN 32 to DN 200
- Max. operating pressure 16 bar

Materials

- Pump housing and lantern: Standard: EN-GJL-250
- Impeller: Standard: EN-GJL-200; special version: Bronze CuSn 10
- Shaft: 1.4122
- Mechanical seal: AQEGG; other mechanical seals on request

Description/construction

Single-stage, low-pressure twin-head pump in in-line design with

- Switchover valve
- Mechanical seal
- Flange connection with pressure measuring connection R¹/₈
- Lantern
- Coupling
- IEC standard motor

Special features/product advantages

- Reduced life cycle costs through optimised efficiency
- Can be used flexibly in air-conditioning and cooling systems, with application benefits due to direct draining of condensate via optimised lantern design (patented)
- High standard of corrosion protection thanks to cathaphoretic coating
- Main/standby mode or peak-load operation (by means of external auxiliary device)

Product list: Wilo-CronoTwin-DL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Port-to-port length l_0	Nominal flange diameter	Gross weight, approx. m	Article number
CronoTwin-DL 32/140-1,5/2	3~400 V, 50 Hz	IE3	1.50 kW	320 mm	DN 32	133.3 kg	2121010
CronoTwin-DL 32/150-2,2/2	3~400 V, 50 Hz	IE3	2.20 kW	320 mm	DN 32	138.3 kg	2121011
CronoTwin-DL 32/160-2,2/2	3~400 V, 50 Hz	IE3	2.20 kW	320 mm	DN 32	138.3 kg	2121012
CronoTwin-DL 32/160-3/2	3~400 V, 50 Hz	IE3	3.00 kW	320 mm	DN 32	146.5 kg	2121013
CronoTwin-DL 32/170-3/2	3~400 V, 50 Hz	IE3	3.00 kW	320 mm	DN 32	146.5 kg	2121014
CronoTwin-DL 32/170-4/2	3~400 V, 50 Hz	IE3	4.00 kW	320 mm	DN 32	161.7 kg	2121015
CronoTwin-DL 50/110-1,5/2	3~400 V, 50 Hz	IE3	1.50 kW	340 mm	DN 50	129.5 kg	2121022
CronoTwin-DL 50/120-2,2/2	3~400 V, 50 Hz	IE3	2.20 kW	340 mm	DN 50	132.2 kg	2121023
CronoTwin-DL 50/130-3/2	3~400 V, 50 Hz	IE3	3.00 kW	340 mm	DN 50	144.1 kg	2121024
CronoTwin-DL 50/140-3/2	3~400 V, 50 Hz	IE3	3.00 kW	340 mm	DN 50	141.8 kg	2121025
CronoTwin-DL 50/140-4/2	3~400 V, 50 Hz	IE3	4.00 kW	340 mm	DN 50	157.0 kg	2121026
CronoTwin-DL 50/160-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	340 mm	DN 50	202.2 kg	2121027
CronoTwin-DL 50/170-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	340 mm	DN 50	202.2 kg	2121028
CronoTwin-DL 50/170-7,5/2	3~400 V, 50 Hz	IE3	7.50 kW	340 mm	DN 50	216.2 kg	2121029
CronoTwin-DL 50/180-7,5/2	3~400 V, 50 Hz	IE3	7.50 kW	440 mm	DN 50	244.2 kg	2121030
CronoTwin-DL 50/210-11/2	3~400 V, 50 Hz	IE3	11.00 kW	440 mm	DN 50	335.2 kg	2121031
CronoTwin-DL 50/220-11/2	3~400 V, 50 Hz	IE3	11.00 kW	440 mm	DN 50	335.2 kg	2121032
CronoTwin-DL 50/220-15/2	3~400 V, 50 Hz	IE3	15.00 kW	440 mm	DN 50	372.4 kg	2121033
CronoTwin-DL 40/140-2,2/2	3~400 V, 50 Hz	IE3	2.20 kW	340 mm	DN 40	139.6 kg	2121016
CronoTwin-DL 40/150-3/2	3~400 V, 50 Hz	IE3	3.00 kW	340 mm	DN 40	147.8 kg	2121017
CronoTwin-DL 40/160-4/2	3~400 V, 50 Hz	IE3	4.00 kW	340 mm	DN 40	163.0 kg	2121018
CronoTwin-DL 40/170-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	340 mm	DN 40	198.2 kg	2121019
CronoTwin-DL 40/200-7,5/2	3~400 V, 50 Hz	IE3	7.50 kW	440 mm	DN 40	235.0 kg	2121020

Product list: Wilo-CronoTwin-DL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Port-to-port length l_0	Nominal flange diameter	Gross weight, approx. m	Article number
CronoTwin-DL 40/220-11/2	3~400 V, 50 Hz	IE3	11.00 kW	440 mm	DN 40	330.1 kg	2121021
CronoTwin-DL 65/110-3/2	3~400 V, 50 Hz	IE3	3.00 kW	340 mm	DN 65	149.4 kg	2121034
CronoTwin-DL 65/120-3/2	3~400 V, 50 Hz	IE3	3.00 kW	340 mm	DN 65	149.4 kg	2121035
CronoTwin-DL 65/120-4/2	3~400 V, 50 Hz	IE3	4.00 kW	340 mm	DN 65	164.6 kg	2121036
CronoTwin-DL 65/130-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	340 mm	DN 65	199.4 kg	2121037
CronoTwin-DL 65/140-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	340 mm	DN 65	199.4 kg	2121038
CronoTwin-DL 65/140-7,5/2	3~400 V, 50 Hz	IE3	7.50 kW	340 mm	DN 65	213.4 kg	2121039
CronoTwin-DL 65/150-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	430 mm	DN 65	220.3 kg	2121040
CronoTwin-DL 65/160-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	430 mm	DN 65	220.3 kg	2121041
CronoTwin-DL 65/160-7,5/2	3~400 V, 50 Hz	IE3	7.50 kW	430 mm	DN 65	234.3 kg	2121042
CronoTwin-DL 65/170-11/2	3~400 V, 50 Hz	IE3	11.00 kW	430 mm	DN 65	319.1 kg	2121043
CronoTwin-DL 65/200-11/2	3~400 V, 50 Hz	IE3	11.00 kW	475 mm	DN 65	348.0 kg	2121044
CronoTwin-DL 65/200-15/2	3~400 V, 50 Hz	IE3	15.00 kW	475 mm	DN 65	384.0 kg	2121045
CronoTwin-DL 65/210-15/2	3~400 V, 50 Hz	IE3	15.00 kW	475 mm	DN 65	384.0 kg	2121046
CronoTwin-DL 65/210-18,5/2	3~400 V, 50 Hz	IE3	18.50 kW	475 mm	DN 65	416.0 kg	2121047
CronoTwin-DL 65/220-18,5/2	3~400 V, 50 Hz	IE3	18.50 kW	475 mm	DN 65	416.0 kg	2121048
CronoTwin-DL 65/220-22/2	3~400 V, 50 Hz	IE3	22.00 kW	475 mm	DN 65	581.7 kg	2121049
CronoTwin-DL 80/120-4/2	3~400 V, 50 Hz	IE3	4.00 kW	400 mm	DN 80	180.4 kg	2121050
CronoTwin-DL 80/130-5,5/2	3~400 V, 50 Hz	IE3	5.50 kW	400 mm	DN 80	215.1 kg	2121051
CronoTwin-DL 80/140-7,5/2	3~400 V, 50 Hz	IE3	7.50 kW	400 mm	DN 80	229.1 kg	2121052
CronoTwin-DL 80/150-7,5/2	3~400 V, 50 Hz	IE3	7.50 kW	440 mm	DN 80	246.3 kg	2121053
CronoTwin-DL 80/160-11/2	3~400 V, 50 Hz	IE3	11.00 kW	440 mm	DN 80	328.0 kg	2121054
CronoTwin-DL 80/170-11/2	3~400 V, 50 Hz	IE3	11.00 kW	440 mm	DN 80	328.0 kg	2121055

Product list: Wilo-CronoTwin-DL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Port-to-port length l_0	Nominal flange diameter	Gross weight, approx. m	Article number
CronoTwin-DL 80/170-15/2	3~400 V, 50 Hz	IE3	15.00 kW	440 mm	DN 80	364.0 kg	2121056
CronoTwin-DL 80/190-15/2	3~400 V, 50 Hz	IE3	15.00 kW	500 mm	DN 80	411.4 kg	2121057
CronoTwin-DL 80/190-18,5/2	3~400 V, 50 Hz	IE3	18.50 kW	500 mm	DN 80	443.4 kg	2121058
CronoTwin-DL 80/200-18,5/2	3~400 V, 50 Hz	IE3	18.50 kW	500 mm	DN 80	443.4 kg	2121059
CronoTwin-DL 80/200-22/2	3~400 V, 50 Hz	IE3	22.00 kW	500 mm	DN 80	615.0 kg	2121060
CronoTwin-DL 80/220-30/2	3~400 V, 50 Hz	IE3	30.00 kW	500 mm	DN 80	717.3 kg	2121061
CronoTwin-DL 100/145-11/2	3~400 V, 50 Hz	IE3	11.00 kW	500 mm	DN 100	382.8 kg	2121062
CronoTwin-DL 100/150-15/2	3~400 V, 50 Hz	IE3	15.00 kW	500 mm	DN 100	418.8 kg	2121063
CronoTwin-DL 100/160-15/2	3~400 V, 50 Hz	IE3	15.00 kW	500 mm	DN 100	418.8 kg	2121064
CronoTwin-DL 100/160-18,5/2	3~400 V, 50 Hz	IE3	18.50 kW	500 mm	DN 100	450.8 kg	2121065
CronoTwin-DL 100/165-22/2	3~400 V, 50 Hz	IE3	22.00 kW	500 mm	DN 100	616.5 kg	2121066
CronoTwin-DL 100/170-30/2	3~400 V, 50 Hz	IE3	30.00 kW	500 mm	DN 100	717.5 kg	2121067
CronoTwin-DL 100/190-30/2	3~400 V, 50 Hz	IE3	30.00 kW	550 mm	DN 100	745.8 kg	2121068
CronoTwin-DL 100/210-30/2	3~400 V, 50 Hz	IE3	30.00 kW	550 mm	DN 100	745.8 kg	2121069
CronoTwin-DL 100/210-37/2	3~400 V, 50 Hz	IE3	37.00 kW	550 mm	DN 100	783.8 kg	2121070
CronoTwin-DL 32/170-0,55/4	3~400 V, 50 Hz	IE2	0.55 kW	320 mm	DN 32	92.8 kg	2063734
CronoTwin-DL 32/150-0,37/4	3~400 V, 50 Hz	IE2	0.37 kW	320 mm	DN 32	79.9 kg	2089226
CronoTwin-DL 32/140-0,25/4	3~400 V, 50 Hz	IE2	0.25 kW	320 mm	DN 32	78.9 kg	2089227
CronoTwin-DL 40/160-0,55/4	3~400 V, 50 Hz	IE2	0.55 kW	340 mm	DN 40	108.5 kg	2089237
CronoTwin-DL 40/150-0,37/4	3~400 V, 50 Hz	IE2	0.37 kW	340 mm	DN 40	81.1 kg	2089238
CronoTwin-DL 40/140-0,25/4	3~400 V, 50 Hz	IE2	0.25 kW	340 mm	DN 40	80.2 kg	2089239
CronoTwin-DL 50/150-0,55/4	3~400 V, 50 Hz	IE2	0.55 kW	340 mm	DN 50	113.0 kg	2089253
CronoTwin-DL 40/170-0,75/4	3~400 V, 50 Hz	IE3	0.75 kW	340 mm	DN 40	115.5 kg	2120943

Product list: Wilo-CronoTwin-DL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Port-to-port length l_0	Nominal flange diameter	Gross weight, approx. m	Article number
CronoTwin-DL 40/210-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	440 mm	DN 40	145.3 kg	2120944
CronoTwin-DL 40/220-1,5/4	3~400 V, 50 Hz	IE3	1.50 kW	440 mm	DN 40	150.3 kg	2120945
CronoTwin-DL 50/160-0,75/4	3~400 V, 50 Hz	IE3	0.75 kW	340 mm	DN 50	120.0 kg	2120946
CronoTwin-DL 50/170-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	340 mm	DN 50	136.1 kg	2120947
CronoTwin-DL 50/200-1,5/4	3~400 V, 50 Hz	IE3	1.50 kW	440 mm	DN 50	161.0 kg	2120948
CronoTwin-DL 50/220-2,2/4	3~400 V, 50 Hz	IE3	2.20 kW	440 mm	DN 50	179.0 kg	2120949
CronoTwin-DL 50/260-3/4	3~400 V, 50 Hz	IE3	3.00 kW	440 mm	DN 50	212.2 kg	2120950
CronoTwin-DL 50/270-3/4	3~400 V, 50 Hz	IE3	3.00 kW	440 mm	DN 50	212.2 kg	2120951
CronoTwin-DL 50/270-4/4	3~400 V, 50 Hz	IE3	4.00 kW	440 mm	DN 50	226.2 kg	2120952
CronoTwin-DL 65/150-0,75/4	3~400 V, 50 Hz	IE3	0.75 kW	430 mm	DN 65	138.3 kg	2120953
CronoTwin-DL 65/160-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	430 mm	DN 65	154.4 kg	2120954
CronoTwin-DL 65/170-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	430 mm	DN 65	154.4 kg	2120955
CronoTwin-DL 65/170-1,5/4	3~400 V, 50 Hz	IE3	1.50 kW	430 mm	DN 65	162.4 kg	2120956
CronoTwin-DL 65/210-2,2/4	3~400 V, 50 Hz	IE3	2.20 kW	475 mm	DN 65	187.0 kg	2120957
CronoTwin-DL 65/220-2,2/4	3~400 V, 50 Hz	IE3	2.20 kW	475 mm	DN 65	187.0 kg	2120958
CronoTwin-DL 65/220-3/4	3~400 V, 50 Hz	IE3	3.00 kW	475 mm	DN 65	203.0 kg	2120959
CronoTwin-DL 65/250-3/4	3~400 V, 50 Hz	IE3	3.00 kW	475 mm	DN 65	219.4 kg	2120960
CronoTwin-DL 65/250-4/4	3~400 V, 50 Hz	IE3	4.00 kW	475 mm	DN 65	233.4 kg	2120961
CronoTwin-DL 65/270-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	475 mm	DN 65	307.7 kg	2120962
CronoTwin-DL 80/150-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	440 mm	DN 80	166.0 kg	2120963
CronoTwin-DL 80/160-1,5/4	3~400 V, 50 Hz	IE3	1.50 kW	440 mm	DN 80	171.0 kg	2120964
CronoTwin-DL 80/170-2,2/4	3~400 V, 50 Hz	IE3	2.20 kW	440 mm	DN 80	194.4 kg	2120965
CronoTwin-DL 80/210-3/4	3~400 V, 50 Hz	IE3	3.00 kW	500 mm	DN 80	230.3 kg	2120966

Product list: Wilo-CronoTwin-DL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Port-to-port length l_0	Nominal flange diameter	Gross weight, approx. m	Article number
CronoTwin-DL 80/220-4/4	3~400 V, 50 Hz	IE3	4.00 kW	500 mm	DN 80	244.5 kg	2120967
CronoTwin-DL 80/270-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	500 mm	DN 80	345.4 kg	2120968
CronoTwin-DL 100/145-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	500 mm	DN 100	212.3 kg	2120969
CronoTwin-DL 100/150-1,5/4	3~400 V, 50 Hz	IE3	1.50 kW	500 mm	DN 100	217.3 kg	2120970
CronoTwin-DL 100/160-2,2/4	3~400 V, 50 Hz	IE3	2.20 kW	500 mm	DN 100	232.6 kg	2120971
CronoTwin-DL 100/170-3/4	3~400 V, 50 Hz	IE3	3.00 kW	500 mm	DN 100	253.4 kg	2120972
CronoTwin-DL 100/200-3/4	3~400 V, 50 Hz	IE3	3.00 kW	550 mm	DN 100	258.1 kg	2120973
CronoTwin-DL 100/200-4/4	3~400 V, 50 Hz	IE3	4.00 kW	550 mm	DN 100	272.1 kg	2120974
CronoTwin-DL 100/220-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	550 mm	DN 100	347.4 kg	2120975
CronoTwin-DL 100/250-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	550 mm	DN 100	372.2 kg	2120976
CronoTwin-DL 100/250-7,5/4	3~400 V, 50 Hz	IE3	7.50 kW	550 mm	DN 100	394.7 kg	2120977
CronoTwin-DL 100/260-11/4	3~400 V, 50 Hz	IE3	11.00 kW	550 mm	DN 100	448.1 kg	2120978
CronoTwin-DL 100/270-11/4	3~400 V, 50 Hz	IE3	11.00 kW	550 mm	DN 100	448.1 kg	2120979
CronoTwin-DL 125/190-4/4	3~400 V, 50 Hz	IE3	4.00 kW	620 mm	DN 125	292.8 kg	2120980
CronoTwin-DL 125/210-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	620 mm	DN 125	368.0 kg	2120981
CronoTwin-DL 125/220-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	620 mm	DN 125	368.0 kg	2120982
CronoTwin-DL 125/220-7,5/4	3~400 V, 50 Hz	IE3	7.50 kW	620 mm	DN 125	388.0 kg	2120983
CronoTwin-DL 125/250-11/4	3~400 V, 50 Hz	IE3	11.00 kW	620 mm	DN 125	493.6 kg	2120984
CronoTwin-DL 125/270-11/4	3~400 V, 50 Hz	IE3	11.00 kW	620 mm	DN 125	493.6 kg	2120985
CronoTwin-DL 125/270-15/4	3~400 V, 50 Hz	IE3	15.00 kW	620 mm	DN 125	537.6 kg	2120986
CronoTwin-DL 125/300-18,5/4	3~400 V, 50 Hz	IE3	18.50 kW	700 mm	DN 125	647.3 kg	2120987
CronoTwin-DL 125/320-18,5/4	3~400 V, 50 Hz	IE3	18.50 kW	700 mm	DN 125	647.3 kg	2120988
CronoTwin-DL 125/320-22/4	3~400 V, 50 Hz	IE3	22.00 kW	700 mm	DN 125	749.3 kg	2120989

Product list: Wilo-CronoTwin-DL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Port-to-port length l_0	Nominal flange diameter	Gross weight, approx. m	Article number
CronoTwin-DL 125/340-30/4	3~400 V, 50 Hz	IE3	30.00 kW	700 mm	DN 125	875.6 kg	2120990
CronoTwin-DL 150/190-5,5/4	3~400 V, 50 Hz	IE3	5.50 kW	700 mm	DN 150	443.9 kg	2120991
CronoTwin-DL 150/200-7,5/4	3~400 V, 50 Hz	IE3	7.50 kW	700 mm	DN 150	463.9 kg	2120992
CronoTwin-DL 150/220-11/4	3~400 V, 50 Hz	IE3	11.00 kW	700 mm	DN 150	515.3 kg	2120993
CronoTwin-DL 150/250-15/4	3~400 V, 50 Hz	IE3	15.00 kW	700 mm	DN 150	635.4 kg	2120994
CronoTwin-DL 150/260-15/4	3~400 V, 50 Hz	IE3	15.00 kW	700 mm	DN 150	648.4 kg	2120995
CronoTwin-DL 150/260-18,5/4	3~400 V, 50 Hz	IE3	18.50 kW	700 mm	DN 150	706.2 kg	2120996
CronoTwin-DL 150/270-18,5/4	3~400 V, 50 Hz	IE3	18.50 kW	700 mm	DN 150	709.2 kg	2120997
CronoTwin-DL 150/270-22/4	3~400 V, 50 Hz	IE3	22.00 kW	700 mm	DN 150	808.2 kg	2120998
CronoTwin-DL 200/240-15/4	3~400 V, 50 Hz	IE3	15.00 kW	800 mm	DN 200	782.5 kg	2121003
CronoTwin-DL 200/250-18,5/4	3~400 V, 50 Hz	IE3	18.50 kW	800 mm	DN 200	843.3 kg	2121004
CronoTwin-DL 200/260-22/4	3~400 V, 50 Hz	IE3	22.00 kW	800 mm	DN 200	945.3 kg	2121005
CronoTwin-DL 200/270-30/4	3~400 V, 50 Hz	IE3	30.00 kW	800 mm	DN 200	1070.2 kg	2121006
CronoTwin-DL 65/120-0,55/4	3~400 V, 50 Hz	IE2	0.55 kW	340 mm	DN 65	108.7 kg	2139468
CronoTwin-DL 65/130-0,75/4	3~400 V, 50 Hz	IE3	0.75 kW	340 mm	DN 65	115.7 kg	2142054
CronoTwin-DL 65/140-1,1/4	3~400 V, 50 Hz	IE3	1.10 kW	340 mm	DN 65	131.7 kg	2142055
CronoTwin-DL 200/300-37/4	3~400 V, 50 Hz	IE3	37.00 kW	820 mm	DN 200	1197.1 kg	2142056
CronoTwin-DL 200/315-37/4	3~400 V, 50 Hz	IE3	37.00 kW	820 mm	DN 200	1197.1 kg	2142057
CronoTwin-DL 200/335-37/4	3~400 V, 50 Hz	IE3	37.00 kW	820 mm	DN 200	1197.1 kg	2142058
CronoTwin-DL 200/335-45/4	3~400 V, 50 Hz	IE3	45.00 kW	820 mm	DN 200	1267.1 kg	2142059
CronoTwin-DL 200/345-45/4	3~400 V, 50 Hz	IE3	45.00 kW	820 mm	DN 200	1267.1 kg	2142060
CronoTwin-DL 200/345-55/4	3~400 V, 50 Hz	IE3	55.00 kW	820 mm	DN 200	1780.6 kg	2142061
CronoTwin-DL 150/335-45/4	3~400 V, 50 Hz	IE3	45.00 kW	770 mm	DN 150	1148.0 kg	2151761

Product list: Wilo-CronoTwin-DL

Product description	Mains connection	Motor efficiency class	Rated power P_2	Port-to-port length l_0	Nominal flange diameter	Gross weight, approx. m	Article number
CronoTwin-DL 150/335-37/4	3~400 V, 50 Hz	IE3	37.00 kW	770 mm	DN 150	1078.0 kg	2151762
CronoTwin-DL 150/325-37/4	3~400 V, 50 Hz	IE3	37.00 kW	770 mm	DN 150	1078.0 kg	2151763
CronoTwin-DL 150/325-30/4	3~400 V, 50 Hz	IE3	30.00 kW	770 mm	DN 150	994.5 kg	2151764
CronoTwin-DL 150/305-30/4	3~400 V, 50 Hz	IE3	30.00 kW	770 mm	DN 150	994.5 kg	2151765